


Inducs Metos Hold-line HO/IN 1600-GN

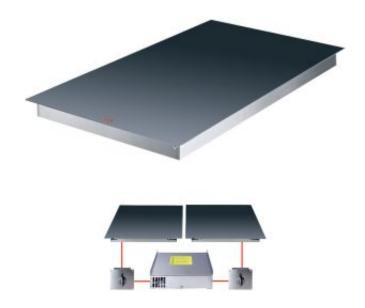

Product information

Artikelnummer 4231602

Productnaam Inducs Metos Hold-line HO/IN 1600-GN

Afmetingen $320X 2 \times 520 \times 75 \text{ mm}$

Gewicht 21,800 kg

Capacity Plates 2x320x520x75 mm
Technical information 230 V, 10 A, 1,6 kW, 1N, 50 Hz

Description

Metos Induction Hold line HO/IN 1600-GN

Includes two induction heating plates, one generator and two temperature controls.

INDUCTION HEATING PLATES

Drop in induction plates measures are $520 \times 320 \times 75$ mm. They are suitable for all the containers designed for induction use and esp ecially well for GN 1/1- containers. Flat and compact design helps the installation.

Accurate temperature control thanks to three temperature sensors and six induction coils.

Large and clear temperature display on the induction plates.

Strong dark ceramic glass surface stands a heavy use and is easy to clean.

Energy efficient and safe solution. No additional power output when the containers are removed from induction plates.

Power is concentrated only into the containers, which reduces the



unnecessary heating around the environment. Efficiency is 800 Watts per plate

• GENERATOR

One efficient generator.

Easy to install with plugged cable connection.

Please note! The generator requires a powerful ventilation to keep is at the operating temperature.

• TEMPERATURE CONTROL

One temperature control for each induction plate.

Stepless temperature adjusting from 50°C - 100°C

Real time temperature control maintains the entered temperature to within a degree.

Control measures the bottom temperature of the containers.